

WHAT IS IT

Self-priming centrifugal pump for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks, for transferring liquids and emptying tanks; also used for gardening.


MAIN USES



water supply and pressurization for irrigation of gardens and small cultivations



Water supply and pressurization for domestic and residential installations

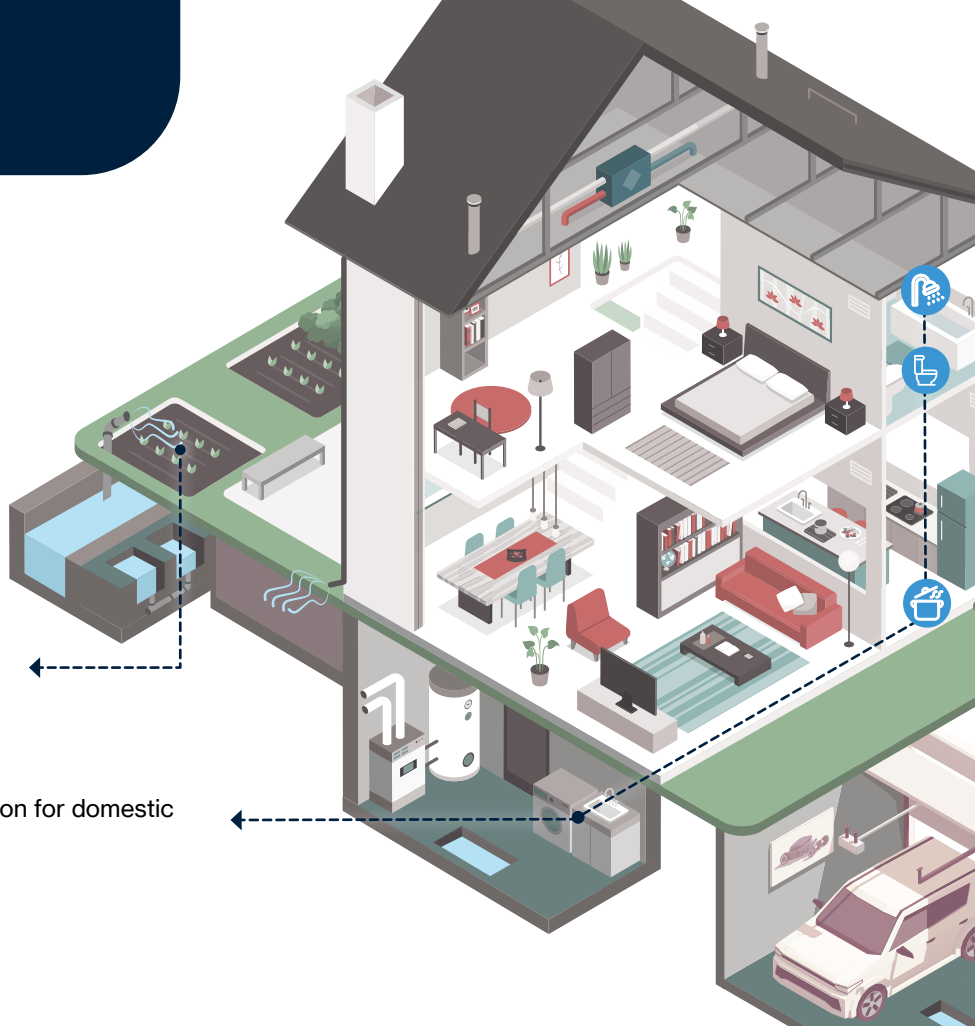

SPECIFICATIONS

Pump Body	Cast iron
Motor bracket	Aluminum
Impeller	Noryl®, brass, AISI 304 for 106N÷146
Mechanical seal	Ceramic-Graphite-NBR
Motor shaft	Stainless steel AISI 416
Liquid temperature	0-50 °C
Operating pressure	max 6 bar (66N÷86N) max 7 bar (106N÷146)
Insulation class	F
Protection degree	IPX4

PERFORMANCE



HEAD
Up to
55,7 mt



FLOW RATE
Up to 250 l/min
(4,2 m³/h)



New
self-priming
system



Increased
range of
models



Better
performance