

JA 150-300

WHAT IS IT

Self-priming centrifugal pump for water supplies (even if mixed with gas) in small and medium household and civil systems; when connected to autoclave tanks, an automatic pressurisation system comes.


MAIN USES



water supply and pressurization for irrigation of gardens and small cultivations



Water supply and pressurization for domestic and residential installations

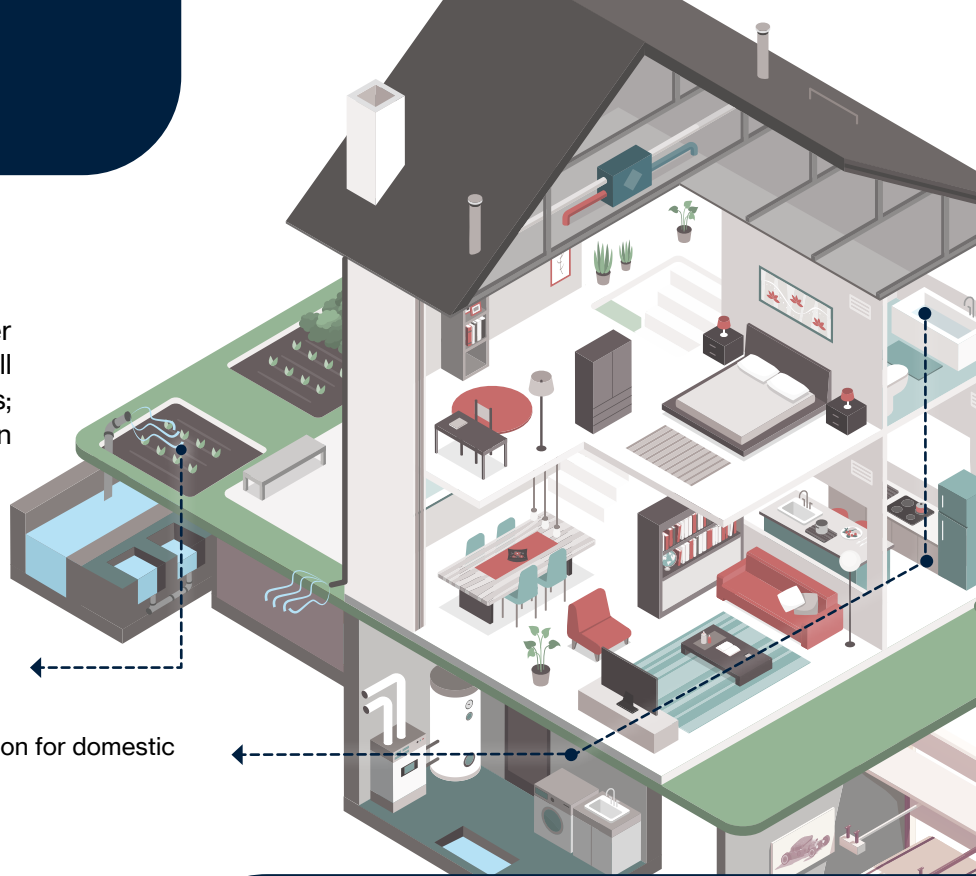

SPECIFICATIONS

Pump Body	Cast iron
Motor bracket	Cast iron
Impeller	Noryl® or Brass
Mechanical seal	Ceramic-Graphite
Motor shaft	Stainless steel AISI 303 hydraulic side
Liquid temperature	0-50 °C
Operating pressure	Max 8 bar
Insulation class	F

PLUS & PERFORMANCE



New self-priming system



Increased range of models



Better performance

JA 150

m ³ /h	1,2	3	5,4
l/min	20	50	90
H (m)	56,5	48	32

JA 200

m ³ /h	1,2	3	5,4
l/min	20	50	90
H (m)	59,5	54	42,5

JA 300

m ³ /h	1,2	3	5,4
l/min	20	50	90
H (m)	62	57	47